

Technical data:

Type of Protection	: Ex d IIB T4/T6
Conforming to	: Standards IEC 60079-0 to 1 or UL 60079-1
Marking for test	: Ex II2G
Degree of Protection	: IP54/ IP66 (Option) acc. To IEC 60529
Ambient Temp. (Ta)	: -20°C to + 40°C or + 55°C
Rated Voltage	: 220 - 240 V. A.C 50Hz.
Lamp (LED)	: 9 W. or 12 W.
Color Temperature	: Daylight (6000K ± 250K)
Luminous Intensity	: 726 lm, Daylight (9W) ,910 lm, Daylight (12W)
Testing System	: Auto Check
Battery Type	: Lithium Iron Phosphate (LiFePO4) 3.2V-6000mAh x2
Charging Period	: 10-15 hours
Back up time	: 3 hours
Protection Features	: AC,DC Fuse ,Battery Low Voltage Cut-Off
Entries thread	: 3/4" NPT at right
Protection class for UL.	: Class I, Division1 or 2 Group. C,D Class II, Division1 or 2 Groups. E,F,G Class III



TYPE D

Specification:


Body and cover	: Marine grade copper-free aluminum alloy with epoxy-polyester powder coated , RAL7032 (GREY)
Sealing gasket	: Silicone -40°C to + 175°C
Lid screws	: Stainless steel

Catalogue Number:

Lamp Watts	Cat., No	Temp. Class	
		Ta 40 ° C	Ta 55 ° C
LED Lamp			
2 x 9w.	EMG209	T6	T6
2 x12w.	EMG212		

Dimension:

TYPE D (Push Button—TEST Only)

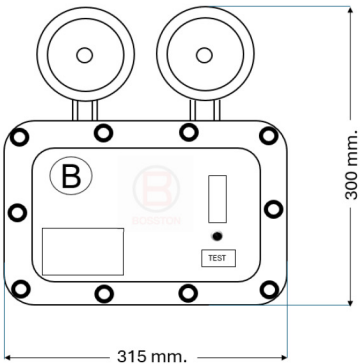

Line ID : @myset
Tel : 094 616 9619



Technical data:

Type of Protection	: Ex d IIB T4/T6
Conforming to	: Standards IEC 60079-0 to 1 or UL 60079-1
Marking for test	: Ex II2G
Degree of Protection	: IP54/66 acc. To IEC 60529
Ambient Temp. (Ta)	: -20°C to + 40°C or + 55°C
Rated Voltage	: 220 - 240 V. A.C 50/60Hz. Output 12,6 V. DC.
Lamp	: 35 W. or 50 W. (Halogen lamp)
Lamp (NEW PRODUCT)	: 9 W. or 12 W. (LED) Auto test TYPE B only
Battery	: 12V. 17Ah (Halogen lamp) , 6V. 7Ah (LED)
Recharge time	: 24-hours from fully discharge (Halogen Lamp)
	: 12-hours from fully discharge (LED)
Emergency duration	: 2-hours (Standard) or 3-4 hour (Made-to-order)
Entries thread	: 3/4" NPT at right
Protection class for UL.	: Class I, Division1 or 2 Group. C,D
	: Class II, Division1 or 2 Groups. E,F,G
	: Class III
Protection class for IEC	: Zone1 , 21 and Zone 2 , 22



TYPE D


TYPE D (Push Button—TEST Only)

Specification:

Body and cover	: Marine grade copper-free aluminum alloy with epoxy-polyester powder coated , RAL7032 (GREY)
Sealing gasket	: Silicone -40°C to + 175°C
Lid screws	: Stainless steel


Catalogue Number:

Lamp Watts	Cat., No	Temp. Class	
		Ta 40 ° C	Ta 55 ° C
Halogen Lamp			
2 x 35w.(Halogen)	EMG235	T5	T4
2 x 50w.(Halogen)	EMG250		
NEW LED Lamp			
2 x 9w. (LED)	EMG209		
2 x12w. (LED)	EMG212		



Dimension:

TYPE B

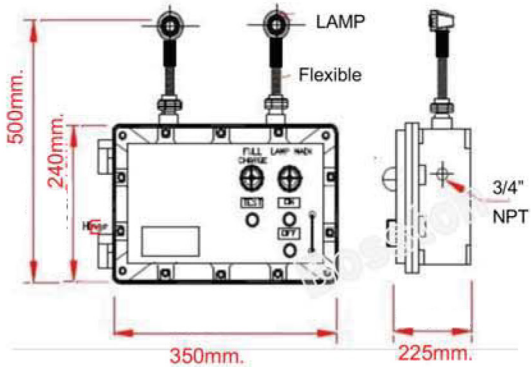

TYPE B

Line ID : @myset
Tel : 094 616 9619





Technical data:

Explosion Protection	: Ex d IIB T6
Conforming to	: Standards IEC 60079 - 0 to 1 or UL 60079-1
Marking for test	: Ex II2G
Degree of Protection	: IP54/65 acc. To IEC 60529
Ambient Temp. (Ta)	: - 5°C to + 55°C
Rated Voltage	: 220 - 240 V. AC. 50/60Hz.
Lamp	: 10 w. For LED
Battery	: 6V. 4Ah (Flu. and Compact Flu.)
Recharge time	: 24-hours from fully discharge
Emergency duration	: 2-hours
Entries thread	: 1/2" NPT
Protection class for UL.	: Class I, Division 1or 2 Group. C,D Class II, Division 1 or 2 Groups. E,F,G Class III
Protection class for IEC	: Zone1 , 21 and Zone 2 , 22



Specification:

Body material	: Marine grade copper-free aluminum alloy with epoxy-polyester powder coated , RAL7032 (GREY)
Lens	: Heat and impact resistant clear glass
Sing face	: White, Green acrylic with red, white color letters.

Catalogue Numbers:

Lamp Watts	Temp. Class (Surface Temp.)		Cat., No.
	40 °C Ta	55 °C Ta	
LED (Chip)			
10 W.	T6	T6	EXIT-R2010LA
10 W.	T6	T6	EXIT-R2010LB

Dimension :

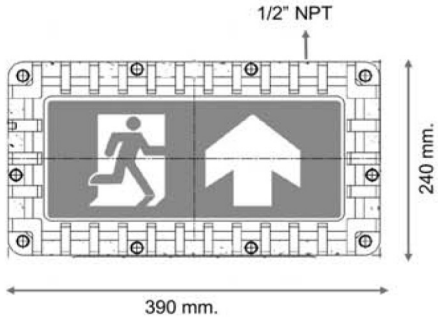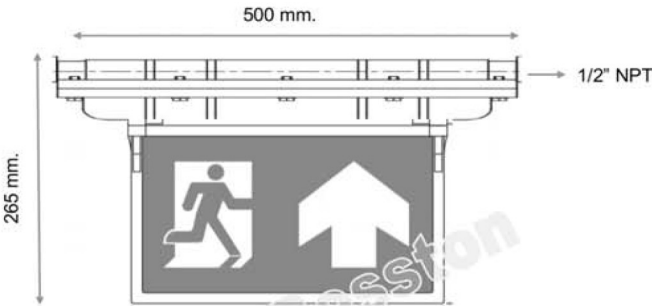

EXIT-R2010LA



EXIT-R2010LB


Technical data:

Explosion Protection	: Ex d IIB T4/T6
Conforming to	: Standards IEC 60079-1 or UL 60079-1
Marking for test	: Ex II2G
Degree of Protection	: IP54/66 acc. To IEC 60529
Ambient Temp. (Ta)	: - 5°C to + 55°C
Rated Voltage	: 220 - 240 V. AC. 50/60Hz.
Lamp	: 1 x 10w. For Flu. , 1 x 26w. For Compact Flu.
LED Life	: 35000 Hrs.
LED Watt. (NEW PRODUCT)	: 10w., 15w.
Battery	: 6V. 4Ah (Flu. and Compact Flu.) : 3.6V. 2.1Ah (LED)
Recharge time	: 24-hours from fully discharge (Flu. and Compact Lamp) : 10-12-hours from fully discharge (LED)
Emergency duration	: 2-hours (Standard) or 3-4 hours (Made-to-order)
Entries thread	: 3/4" NPT
Protection class for UL	: Class I, Division 1 or 2 Group. C,D : Class II, Division 1 or 2 Groups. E,F,G : Class III
Protection class for IEC	: Zone1 , 21 and Zone 2 , 22

Specification:

Body material	: Marine grade copper-free aluminum alloy with epoxy-polyester powder coated , RAL7032 (GREY)
Lens	: Heat and impact resistant clear glass
Sing face	: White, Green acrylic with red, white color letters.

Catalogue Numbers and Dimension:

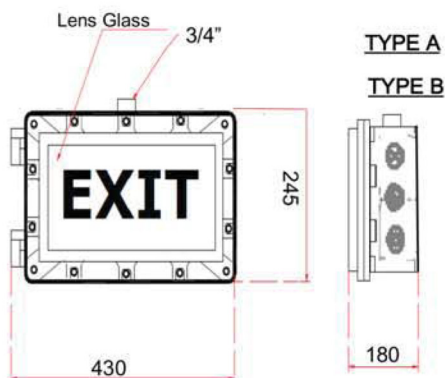

Lamp Watts	Temp. Class (Surface Temp.)		Cat., No.
	40 °C Ta	55 °C Ta	
Fluorescent			
1 x 10 W.	T6	T6	EXIT110F
Compact Fluorescent			
1 x 26 W.	T6	T6	EXIT126CF
LED LAMP			
10w.	T6	T6	EXIT2010L
15w.	T6	T6	EXIT2015L



TYPE A



TYPE B