


## LITHIUM IRON PHOSPHATE FOR DYNO PRODUCTS



Model: ED3236-1B  
Nominal voltage: 3.2 V  
Nominal capacity: 3600 mAh  
For DYNO emergency light model:  
EPD-209



Model: LB3260-1B  
Nominal voltage: 3.2 V  
Nominal capacity: 6000 mAh  
For DYNO emergency light model:  
LFG-09P3T, ECP-2T, RES-09P3T

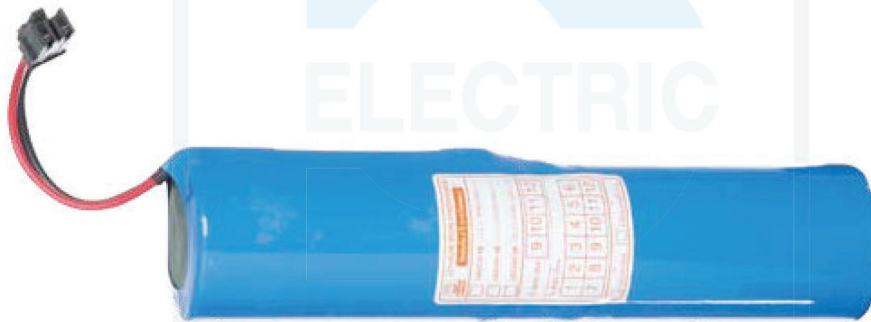

Model: LB3260-2B  
Nominal voltage: 3.2 V  
Nominal capacity: 12000 mAh  
For DYNO emergency light model:  
LFG-12P4T, PWD-IP65-12P4T



Model: TFNX36-1B  
Nominal voltage: 3.2 V  
Nominal capacity: 3600 mAh  
For DYNO night light model:  
NGL-D/A-LT09W3K0-R-LG/MG



Model: EXTA36-1B  
Nominal voltage: 3.2 V  
Nominal capacity: 3600 mAh  
For DYNO exit light model:  
XLF-S10N/R, XLF-S15N/R, BXF-10N/R, TSF-10N

## NIMH BATTERY FOR LED EXIT SIGN



Model NH1221-1BNP  
Type Nickel metal hydride  
Nominal voltage 1 x 1.2 V  
Nominal capacity 2100 mAh



Model NH1221-3B2P  
Type Nickel metal hydride  
Nominal voltage 3 x 1.2 V  
Nominal capacity 2100 mAh  
Connector 2 Pins



Model NH1221-3B4P  
Type Nickel metal hydride  
Nominal voltage 3 x 1.2 V  
Nominal capacity 2100 mAh  
Connector 4 Pins



Model NH1221-4B4P  
Type Nickel metal hydride  
Nominal voltage 4 x 1.2 V  
Nominal capacity 2100 mAh  
Connector 4 Pins



## SEALED LEAD-ACID BATTERY



DJW 6-4.5



DJW 12-5.4



LP 12-7.5

Model	Nominal Voltage	Nominal Capacity	Length (mm)	Width (mm)	Container Height (mm)	Total Height (mm)	Weight (kg)
DJW 6-1.2	6 V	1.2 Ah	97	24	51.5	57.5	0.29
DJW 6-3.2	6 V	3.2 Ah	134	34	60	66	0.67
<b>DJW 6-4.5</b>	<b>6 V</b>	<b>4.5 Ah</b>	<b>70</b>	<b>47</b>	<b>100</b>	<b>106</b>	<b>0.85</b>
DJW 6-7.0	6 V	7.0 Ah	150	34	94	100	1.20
DJW 6-12	6 V	12.0 Ah	151	51	94	100	2.05
DJW 12-1.2	12 V	1.2 Ah	97	43	52	58	0.57
DJW 12-2.3	12 V	2.3 Ah	178	35	60	66	0.97
DJW 12-3.2	12 V	3.2 Ah	134	67	60.5	66.5	1.35
<b>DJW 12-5.4</b>	<b>12 V</b>	<b>5.4 Ah</b>	<b>90</b>	<b>70</b>	<b>101</b>	<b>107</b>	<b>1.75</b>
DJW 12-5.0 (ยาว)	12 V	5 Ah	151	53	93	99	1.75
<b>LP 12-7.5</b>	<b>12 V</b>	<b>7.5 Ah</b>	<b>150</b>	<b>63.5</b>	<b>94.5</b>	<b>100</b>	<b>2.35</b>
DJW 12-9.0	12 V	8.5 Ah	151	65	93.5	99	2.45
LP 12-12	12 V	12.0 Ah	151	98	95	101	3.50
DJW 12-15	12 V	15.0 Ah	181.5	77	167.5	167.5	4.9
LP 12-18	12 V	18 Ah	181.5	77	167.5	167.5	5.32
DJW 12-20	12 V	20.0 Ah	181.5	77	167.5	167.5	6.0
DJW 12-26	12 V	26.0 Ah	166	175	125	125	8.4
DJW 12-33	12 V	33.0 Ah	195	130	164	178	11.2
DJM 1240	12 V	40.0 Ah	197	165	170	170	12.2
DJM 1245	12 V	45.0 Ah	197	165	170	170	13.2
DJM 1250	12 V	50.0 Ah	257	132	200	200	15.7
DJM 1255	12 V	55.0 Ah	229	138	210	216	16.2
DJM 1265	12 V	65.0 Ah	348	167	178	178	21.2
DJM 1270	12 V	70.0 Ah	348	167	178	178	24.0
DJM 1275T	12 V	75.0 Ah	260	168	208	214	22.3
DJM 12100	12 V	100.0 Ah	330	173	212	220	30.6
DJM 12120	12 V	120.0 Ah	408	177	225	225	36.6
DJM 12150	12 V	150.0 Ah	483	170	238.5	238.5	47.2
DJM 12200	12 V	200.0 Ah	522	240	218	224	64.0